


**AIR COOLED ENGINE
3000 r.p.m.**



SINGLE phase

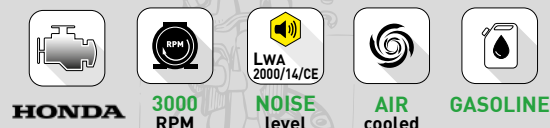

THREE phase

	MGTP 6 AE	MGTP 7 AE 3F
Code	PP77-6MS0	PP78-7TS0
On board control panel equipped with:		
	- DSE ON/OFF switch - DSE 3110 module will display warnings, shutdowns & engine status information as high temperature, low oil pressure, low fuel level warning, Volts & Frequency, running hrs, battery voltage monitoring - Circuit breaker - Emergency Stop - Soundproof canopy - Exhaust gas silencer - 2x32A 1ph 230V EEC socket - 1x16A 1ph 230V EEC socket	- DSE ON/OFF switch - DSE 3110 module will display warnings, shutdowns & engine status information as high temperature, low oil pressure, low fuel level warning, Volts & Frequency, running hrs, battery voltage monitoring - Circuit breaker - Emergency Stop - Soundproof canopy - Exhaust gas silencer - 1x 16A 3Ph 400V EEC socket - 1x 32A 1Ph 230V EEC socket - 1x 16A 1Ph 230V EEC socket
Generator		
Type	Linz E1C10 M H	Linz E1S10M H
Power	6 kVA 230V	7 kVA 400V
Frequency	50 Hz	50 Hz
Engine		
Engine type	HONDA GX390	HONDA GX390
N° cylinders	1	1
Power	11 HP	11 HP
Engine speed	3000 r.p.m.	3000 r.p.m.
Cooling	Air	Air
Fuel	Unleaded gasoline	Unleaded gasoline
Starting system	Electric	Electric
Dimensions & weight		
Fuel tank capacity	21 lt	21 lt
Running Time	7 hrs	7 hrs
Dry weight	190 Kg	190 Kg
Dimensions (L. x W. x H.)	970 x 600 x 750 mm	970 x 600 x 750 mm

OPTIONS

☒ Trolley

The company reserves the right to modify the technical specifications, items and design without notice.
The images of the products are indicative for illustrative purposes only.