



Lighting Towers

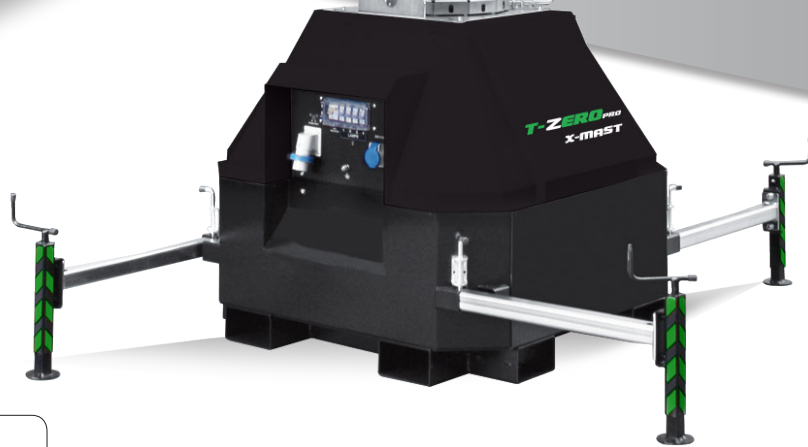
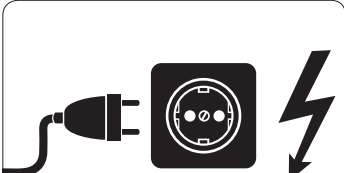


LED TECHNOLOGY

4700 sqm
Illuminated area



PLUG-IN Line


Operation: **POWER**
Inlet plug 16A - 230V
Outlet socket 16A - 230V

X-MAST
4X160W LED - 8,5M
T-ZERO PRO

X-MAST

4x160W LED - 8,5M

T-ZERO^{PRO}



FEATURES

- Multi-directionally adjustable and tiltable floodlights
- 8,5 meters vertical tower, 340° rotatable
- **Manual lifting system by winch complete with auto-braking system**
- Galvanized metalworks
- 80 µm powder coating
- **Very compact dimensions, up to 22 units per truck**
- Sides lifting eyes
- Sites forklift pockets
- Guided main coiled cable to avoid damage during tower operation
- Circuit breaker for electrical protection against overload
- Certified wind stability up to 110 km/h
- 4 extendable & height adjustable stabilizers
- Inlet plug and outlet socket to connect in series more units

ZERO emissions	ZERO fuel costs	ZERO noise	MINIMAL sevice
EASY handling & transportability	LINKABLE TOWERS	4700 sqm illuminated area	Complete SILENCE on work time 8 HOURS A DAY 7 DAYS A WEEK
			22 units per truck VERY COMPACT dimensions

Dimensions & weight	Dimensions min (mm)		Dimensions max(mm)		Total weight (kg)
		1100x1100x2650 (LxWxH)		2360x2360x8500 (LxWxH)	
Floodlights	Type	Power (each)	Floodlights number	IP level	Illuminated area (sqm)
	Led	160W	4	65	4700
Mast	Lifting method	Max Height	Max Wind Speed	Rotation	
	Manual	8,5 m	110 km/h	340°	
Input&output	Inlet plug			Outlet socket	
	16A - 230V			16A - 230V	