

X-SOLAR SAFETY



PLUG-in
POWERED





Protected



Security Status



Video Control

X-SOLAR SAFETY

Static Security Tower

with special Frames for Solar Panels and possibility to ensure safety by reducing CO2 footprint.

Features and Benefits


Non dressed T-Bar head ready to support your choice of security/ monitoring equipment

6 m vertical galvanized manual mast with automatic brake system for quick and simple erection

Special Frame to accept customer's no. 3 Solar Panels, no.1 each side Lower CO2 footprint

4 pull out stabilizers for easy positioning perfectly level on any surface

22 towers to one truck and forklift pockets all sides simplifying transport & storage

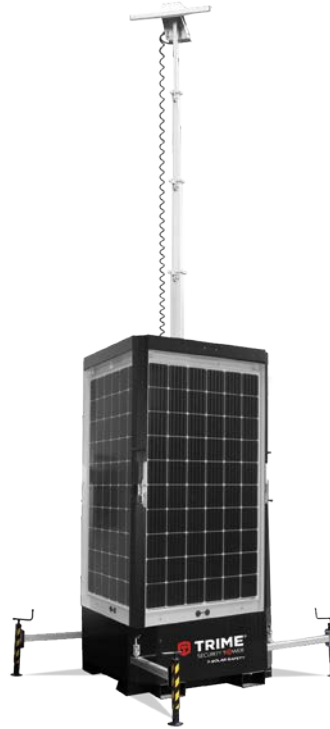

Security equipment not included



Safe store security equipment here



Standard load delivery: **22 towers** per truck

NOTE: Tower is supplied non-dressed, meaning that user must supply & fit their own security monitoring equipment.

Specifications

MAST

Lifting Method	Manual
Max Mast Height	6 m
Rotation	no
Safety brake	Mechanical

DIMENSIONS

Transport dimensions (mm) LxWxH	1220x1220x2500
Dimensions in operation (mm) LxWxH	2500x2500x6000
Dry weight	524 kg

Power Options

Input power from mains or generator, predisposition for Battery Pack (not included)



TRIME
SECURITY TOWER

Trime UK Limited | B3 Spitfire Close, Huntingdon, Cambridgeshire PE29 6XY
01480 220500 | www.trimeuk.com | sales@trimeuk.com