# designed and created for your needs

30-40m water onebulizer

12kVA
Generator required

R.O.T. SYSTEM

Designed to provide an exceptional level of performance for every work on site ensuring the right balance between power and ease of use

**TKS-40** 

HYDRAULIC DRIVEN


more sustainable and environmentally friendly future





# HYDRAULIC DRIVEN

# **30-40**m water 🌢 nebulizer

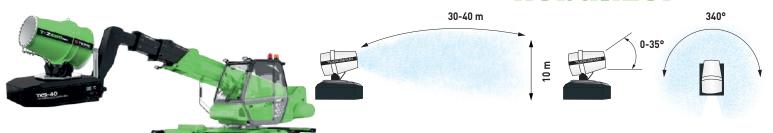



### **APPLICATIONS**



### **FEATURES**

- Integrated control panel
- Hydraulic generator (included)
- SMART START SYSTEM
- Emergency stop button
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Central lifting eye
- Stainless steel crown with 24 nozzles
- Skid base with forklift pockets

# SAFETY

- Reduce dust for healty and safe environment
- Safety automatic clutch compliant with HSE norm
- Remote control with full operation
  - start/stop
  - tilt up/down
  - turn left/right/auto

### **OPTIONS**

- 60 Hz
- External pump for chemicals additives

### R.O.T. SYSTEM

- Remote control, 50m range programmable function"cicle" to start electricmotor-water pump - oscillation with only one button
- Automatic oscillation 0 340° manual area setting
- Electric Tilting System

Technical data	
Electric engine power (kW)	7,5
Fan diameter (mm)	900
Water consumption (I/m)	37 - 43
Coverage without wind (m)	30 - 40
Max. water throw height (m)	20
Water connection	UNI 45 or STORZ or CAMLOCK
Min. inlet Water pressure (bar)	1,0
Water inlet filter (mesh)	60
Y Filter (µm)	60
Electric Tilting system	500
Automatic oscillation	0 - 35°
Dimensions (mm)	-
Weight (kg)	850
Hydraulic generator included (kVA)	12
Secondary Hydraulic circuit	40I - 140/150 bar



hydraulic generator included

