# designed and created for your needs

40-50m water onebulizer

**Generator required** 

Designed to provide an exceptional level of performance for every work on site ensuring the right balance between power and ease of use

**TKS-50** 

SKID



more sustainable and environmentally friendly future






Stainless steel crown with 24 nozzles

# 40-50M water 🌢 nebulizer

340°

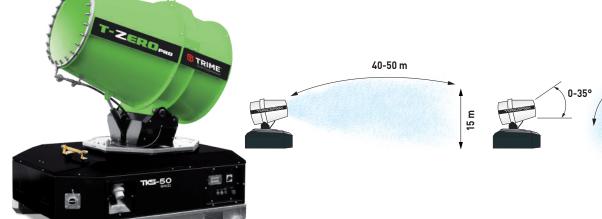

ZERO emissions Electric engine

## **APPLICATIONS**



## **FEATURES**

- Integrated control panel
- SMART START SYSTEM
- Emergency stop button
- Phase inverter
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Manual water drain system
- Central lifting eye
- Forklift pockets
- Stainless steel crown with 24 nozzles
- Galvanized SKID base with forklift pockets

### **SAFETY**

- Reduce dust for healty and safe environment
- Safety automatic clutch compliant with HSE norm
- Remote control with full operation
  - start/stop
  - tilt up/down
  - turn left/right/auto

# **OPTIONS**

- 60 Hz
- External pump for chemicals additives

### R.O.T. SYSTEM

- Remote control, 50m range programmable function"cicle" to start electricmotor-water pump – oscillation with only one button
- Automatic oscillation 0 340° manual area setting
- Electric Tilting System

Technical data	
Electric engine power (kW)	15
Inlet plug	400V3P+N+T 50Hz 32A
Fan diameter (mm)	900
Water consumption (I/m)	37 - 43
Coverage (m)	40 - 50
Water connection	UNI 45 or STORZ or CAMLOCK
Max. water throw height (m)	15
Min. inlet Water pressure (bar)	1.0
Generator required (kVA)	20
Water inlet filter (Mesh)	60
Υ Filter (μm)	500
Electric tilting system	0 - 35°
Automatic oscillation	0 - 340°
Dimensions (mm)	1719x1345x2065
Weight (kg)	790



