

PORTABLE LINE
STAGE V

designed and created
for your needs

MGTP
6000SSY


STAGE 5
CERTIFIED



For a more sustainable
& environmentally
friendly future

 **TRIME**[®]
Power Division

MGTP 6000SSY

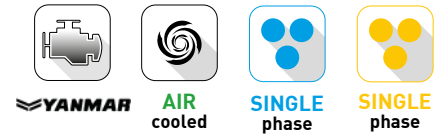

Code	PP15-6MS1
Distribution Panel	
2x 16A-115V CEE socket	
1x 32A-115V CEE socket	
1x 32A-230V CEE socket	
1x 16A-230V CEE socket	
Technical Data	
Single-phase power	6kVA - 230V
Single-phase power	6kVA - 115V
Power factor (cos ϕ)	0.8
Frequency	50 Hz
RPM	3000
Generator	
Model	LINZ E1C10M H
Insulation Class	H
Mechanical Protection	IP23
Engine	
Type	Yanmar L100 AE
EU Emission Stage	Stage V
N. Cylinders	1
Displacement	435 cm ³
Starting system	Electric
Cooling	Air
Fuel	Diesel

Fuel Consumption	
Fuel Tank capacity	25 l
Fuel consumption 75% load PRP	1.4 l/h
Running time	18 h
Dimensions & Weight	
Dry weight	206 Kg
Dimensions (L. x W. x H.)	1010 x 780 x 1000 mm
Standard Features	
6kVA (230V / 110V) AC Aux Power	
Linz alternator	
Yanmar electric start diesel engine (Stage 5)	
HVO (Hydrotreated Vegetable Oil) fuel approved	
Emergency stop button	
Central lifting eye and front & side fork pockets	
Complete with trolley kit + folding handles	
On Board Control Panel Equipped With:	
DSE 3110 Controller and management unit including hour counter and volt meter	
Emergency stop	
ELCB, Main protection	
Voltage selector: 115V/230V	
Noise Level	
Noise level	90 Lwa
Acoustic pressure level 7m	65 dbA

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.