




TRIME®
Power Division




MGTP 6000SSY

PORTABLE LINE - STAGE V

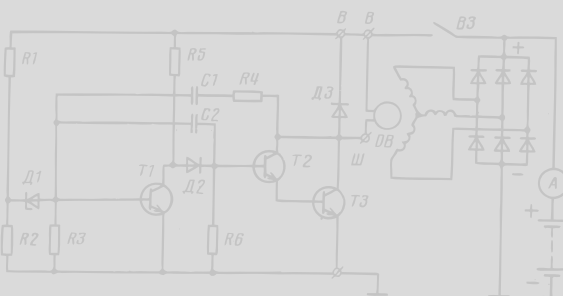

DIESEL ENGINE DRIVEN GENERATING SET
3000 r.p.m.



YANMAR



AIR
cooled



SINGLE
phase



SINGLE
phase

STAGE 5
CERTIFIED



MGTP 600SSY

Code **PP15-6MS1**

DISTRIBUTION PANEL

2x 16A-115V CEE socket
1x 32A-115V CEE socket
1x 32A-230V CEE socket
1x 16A-230V CEE socket

TECHNICAL DATA

Single-phase power	6kVA - 230V
Single-phase power	6kVA - 115V
Power factor (cos φ)	0.8
Frequency	50 Hz
RPM	3000

GENERATOR

LINZ E1C10M H	
Insulation Class	H
Mechanical protection	IP23

ENGINE

Type	Yanmar L100 AE
EU Emission Stage	Stage V
N. Cylinders	1
Displacement	435 cm ³
Starting system	Electric
Cooling	Air
Fuel	Diesel

FUEL CONSUMPTION

Fuel tank capacity	25 l
Fuel consumption 75% load PRP	1,4 l/h
Running time	18 h

DIMENSIONS & WEIGHT

Dry weight	207 Kg
Dimensions (L. x W. x H.)	1570 x 760 x 980 mm

STANDARD FEATURES

6kVA (230V / 110V) AC Aux Power
Linz alternator
Yanmar electric start diesel engine (Stage 5)
HVO (Hydrotreated Vegetable Oil) fuel approved
Emergency stop button
Central lifting eye and front & side fork pockets
Complete with trolley kit + folding handles

ON BOARD CONTROL PANEL EQUIPPED WITH:

DSE 3110 Controller and management unit including hour counter and volt meter
Emergency stop
ELCB, Main protection
Voltage selector: 115V/230V

NOISE LEVEL

Noise level	90 Lwa
Acoustic pressure level 7m	65 dbA

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.