




**TRIME®**  
Power Division



**TG 6000SSY**

**PORTABLE LINE - STAGE V**

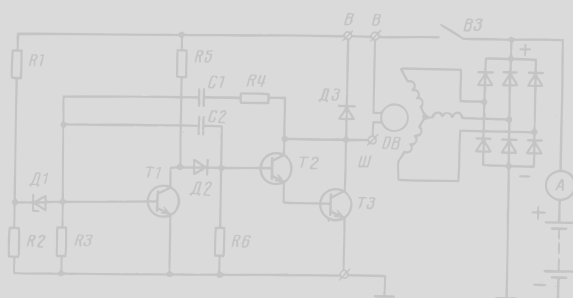

# PORTABLE LINE - STAGE V

TG 600SSY

DIESEL ENGINE DRIVEN GENERATING SET  
3000 r.p.m.



YANMAR



AIR  
cooled



SINGLE  
phase

**STAGE 5**  
**CERTIFIED**

## TG 600SSY

Code **PP15-6MS1**

### DISTRIBUTION PANEL

2x 16A-115V CEE socket  
1x 32A-115V CEE socket  
1x 32A-230V CEE socket  
1x 16A-230V CEE socket

### TECHNICAL DATA

Single-phase power 6kVA - 230V  
Single-phase power 6kVA - 115V  
Power factor (cos  $\phi$ ) 0.8  
Frequency 50 Hz  
RPM 3000

### GENERATOR

LINZ E1C10M H  
Insulation Class H  
Mechanical protection IP23

### ENGINE

Type Yanmar L100 AE  
EU Emission Stage Stage V  
N. Cylinders 1  
Displacement 435 cm<sup>3</sup>  
Starting system Electric  
Cooling Air  
Fuel Diesel

### FUEL CONSUMPTION

Fuel tank capacity 25 l  
Fuel consumption 75% load PRP 1,4 l/h  
Running time 18 h

### DIMENSIONS & WEIGHT

Dry weight 207 Kg  
Dimensions (L. x W. x H.) 1570 x 760 x 980 mm



### STANDARD FEATURES

6kVA (230V / 110V) AC Aux Power  
Linz alternator  
Yanmar electric start diesel engine (Stage 5)  
HVO (Hydrotreated Vegetable Oil) fuel approved  
Emergency stop button  
Central lifting eye and front & side fork pockets  
Fully bunded base (110%)  
Complete with trolley kit + folding handles

### ON BOARD CONTROL PANEL EQUIPPED WITH:

Signal lamp for: Battery charger failure, Low oil pressure, Fuel reserve, ALARM  
Hour counter  
Key switch for: OFF/MAN. START  
Emergency stop  
Volt meter  
ELCB, Main protection  
Voltage selector: 115V/230V

### NOISE LEVEL

Noise level 90 Lwa  
Acoustic pressure level 7m 65 dbA

The company reserves the right to modify the technical specifications, items and design without notice.  
The images of the products are indicative for illustrative purposes only.



Trime UK Limited | B3 Spitfire Close, Huntingdon, Cambridgeshire PE29 6XY  
01480 220500 | [www.trimeuk.com](http://www.trimeuk.com) | [sales@trimeuk.com](mailto:sales@trimeuk.com)