





Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-ECO anti-glare has been created beginning from these characteristics. It is the best solution to your needs and guarantees 3800 sqm of illuminated area. 14 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.





- Multi-directionally adjustable and tiltable floodlights
- 6x150W, 48V LED lights
- 48V power between the generator and the lights
- 7 sections hydraulic vertical tower 8,5 m, 340° rotatable
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 14 units per truck
- Central lifting eye, longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- IP67 level protection certified
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up tp 110 km/h
- 4 height adjustable stabilizers
- On board levels for guidance during stabilization
- Amoss safety breake

- Transport costs Reduced by 45% 14 Lighting Towers on a truck
- 45% Reduction in Yard Space

Kubota 1500 rpm 2 cyl water cooled diesel engine c/w 2 years warranty

- LED lamps
  - mean NO replacement of
- bulbs
- lamp glass
- ballast
- capacitors
- Reducing Call Out Costs
- LED Flood Light guaranteed for 50.000 hours
- Vertical must with Life time warranty




Ease of transport and handling



14 Units Per Truck



You can place 14 units on a single vehicle thanks to one of the compactest footprints on the market.

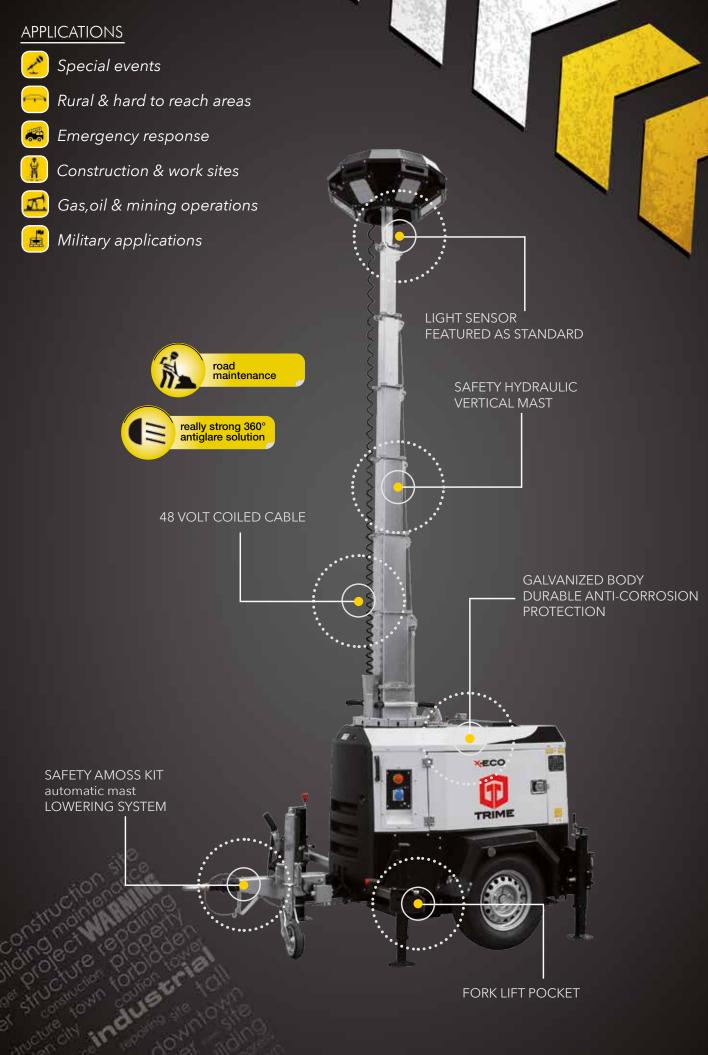

FORK LIFT POCKET

technical data

Model

Frequency (Hz)

Insulation class

Degree of protection

Single phase voltage Auxiliary outlets

Dimensions & weight			
Dimensions min. (mm)	2320x1380x2515		
Dimensions max. (mm)	2320x1550x8500		
Total weight without fuel	920 Kg		
Features			
Rotation	340°		
Floodlights	6x150W		
Lamps	LED		
Options	Timer		
Alternator			

Engine	
Model	Kubota Z482
Fuel	Diesel
r.p.m	1500
Tank capacity (I)	110
Running time (h)	200
Noise level (dBA) at 7m	65
Fuel Consumption	0,55 l/h

## Standard load delivery



Illuminated area (5 lux min.)

3800 sqm

Synchronous

3,5 kVA - 230V

50

Н

IP23



Headings	Standard Lighting Tower	<b>X-ECO</b> Lighting Tower	Monthly Savings when using <b>X-ECO Light Tower</b>
Fuel usage	1,93 l/h	0,55 l/h	1.38 l/h
Fuel costs per month	€ 550,00	€ 150,00	€ 400,00
CO'2 Omissionmonth	1.224 kg	336 kg	888 kg
Run time on full tank	60 h	200 h	140 h
Lamp type	Metal halide	LED	
Light sensor	Optional	Standard	
Amoss kit	Optional	Standard	



## TRIME s.p.a.

Strada per Robecco, snc 20081 Cassinetta di Lugagnano (MI) - Italy Tel. +39 02 942 1724 www.trime.it - info@trime.it

MV | Design