

TKS-40

TRAILER POWER TANK

water
nebulizer
30-40 m




20 kVA
Generator required




Water tank

R.O.T. SYSTEM



Electric
Tilting System



Automatic
Oscillation 340°




Remote control
50m range

TKS-40

TRAILER POWER TANK

water
nebulizer
30-40 m

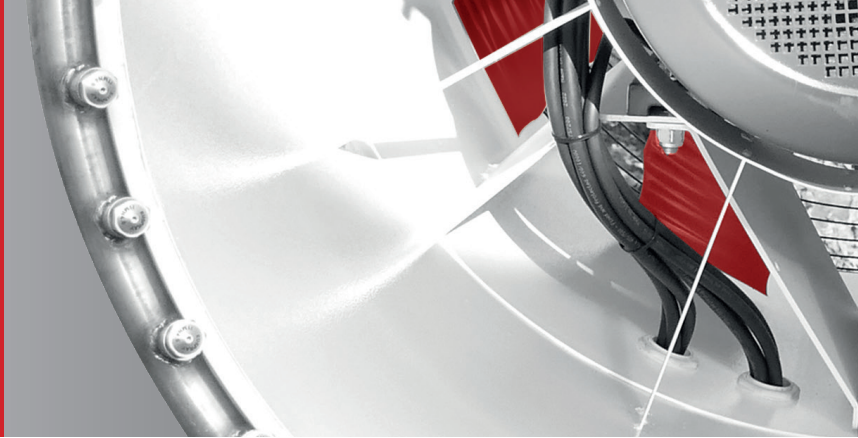

R.O.T. SYSTEM

- Electric Tilting System
- Automatic oscillation 0 - 340°
- Remote control, 50 mt range with all functions:
switch on/off the fan, pump and electric rotation

FEATURE


- Integrated control panel
- Emergency stop button
- 2000 lt stainless still water tank
- Water pump
- 20 kVA integrated generating set
- Water Safety floating switch
- Double Axle Site tow trailer
- SMART START SYSTEM
- Stainless steel crown with 24 nozzles
- Automatic Water drain system
- Lifting eyes
- 4 hight adjustable stabilizers
- Forklift pockets
- Equipped with big size wheels for off-road site

SAFETY

- Reduce dust for healthy and safe environment
- Safety automatic clutch compliant with HSE norm
- Remote control with full operation
 - start/stop
 - tilt up/down
 - turn left/right/auto

OPTIONS


- 60 Hz
- External pump for chemicals additives

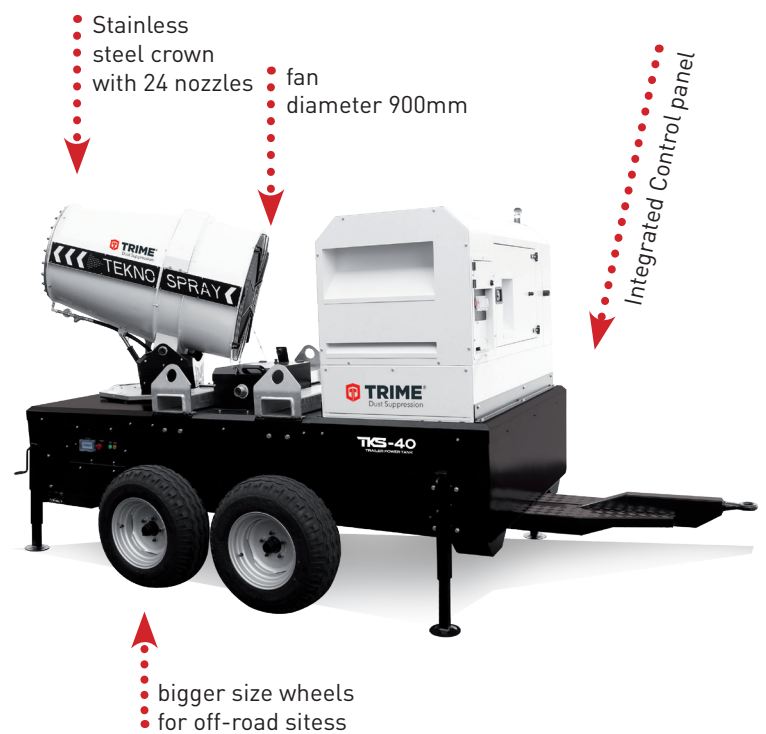

technical data		
Electric engine power	kW	7,5
Coverage (without wind)	m	30 -40
Max. water throw height	m	10
Water connection	-	UNI 45 or STORZ or CAMLOCK
Water consumption	l/m	37 - 43
Water inlet filter	mesh	1600

technical data		
Y Filter	µm	300
Oscillation	-	0 - 340°
Tilting angle	-	0 - 35°
Stainless water tank	l	2000
Fan diameter	mm	900
Dimensions	mm	4430x2260x2463
Weight	Kg	2525

generator		
Power	kWA	20
Engine (Yanmar)		4TNV88-B1B
Rpm		1500
Fuel		Diesel
Fuel tank	l	130
Fuel consumption	l/h	5
Average running time	h	26

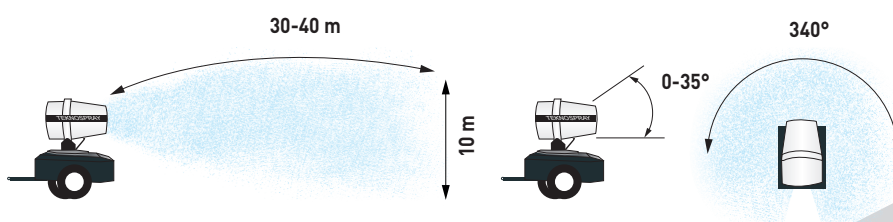

Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it