

WASH BAY

X-WASH X-3



Recycles 100% of water used



Zero contaminants released
down the drain




Outdoor & Indoor use

filtering system



Mod. X-TECH-10
1000 liters' capacity

designed and created
for your needs

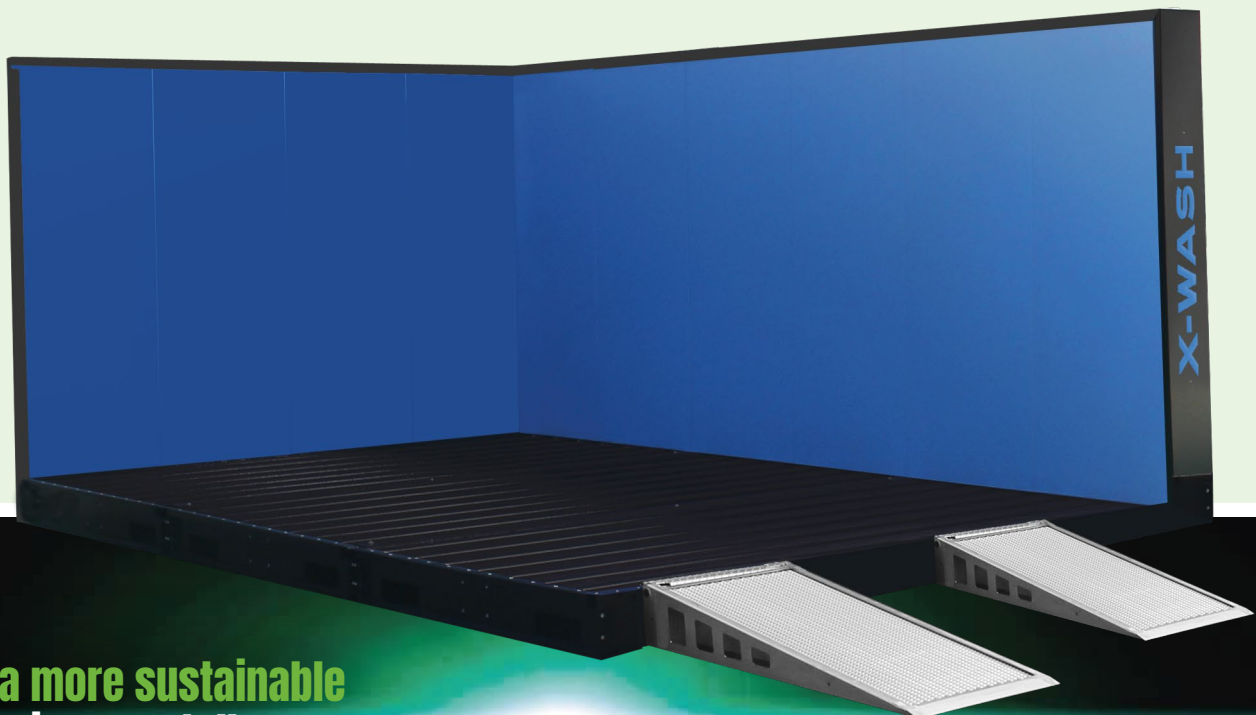


For a more sustainable
& environmentally
friendly future




TRIME[®]
Water Treatments

UNIT DIMENSIONS

X-3 + X-10 Collection Tank:

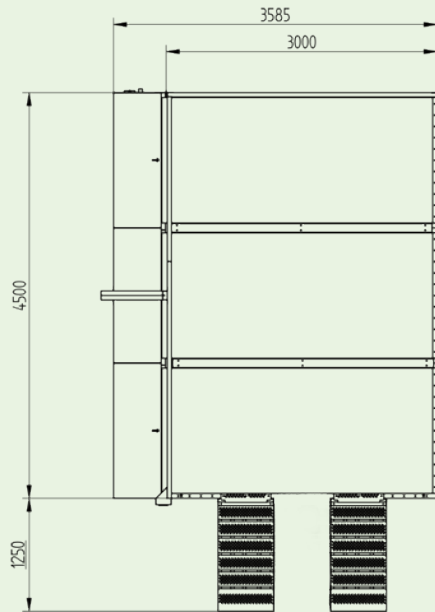

X-10 Filtration Tank:



 **free**
of charge
site survey



A self-contained, environmentally friendly, cleaning system for construction plant and equipment. The wash bay features a diamond tread ramp and a 2200 mm high wall. The wash bay floor pan directs the dirty water and sludge from the equipment being cleaned to a solids collection tank at the rear of the wash bay. Inside the rear tank, a float switch activates a diaphragm pump which delivers the dirty water into the filtration tanks to start the filtration process. After the water has been through this process, a booster pump delivers the water again to your pressure washer. Through the filtering system, you can use the same water repeatedly. The filters inside the separator tank can be easily replaced, guaranteeing an adequate filtering barrier.

FEATURES

- ✓ Recycles 100% of water used for re-use in your pressure washer
- ✓ Closed circuit system
- ✓ Easy to move and transport
- ✓ Quick and simple assembly
- ✓ Zero water waste
- ✓ Environmentally friendly

SITE REQUIREMENTS

- ✓ 230V 16A Electric connection
- ✓ Water connection
- ✓ Flat and level concrete base works

Technical data

Wash bay area dimension (mm)	3000 x 4500
Total dimension (mm)	5750 x 3585
Filtration tank dimension (mm)	(X-10) 2810 x 740 x 990h
Maximum load capacity (kg)	5000
Walls standard height (mm)	2200
Total dry weight of the bay (kg)	1720
Diaphragm pump	0,054 kW – 17lt/min
Booster pump	0,37 kW – 5 to 40 lt/min
Filtering system	X-TECH-10
Option filtering system	X-TECH-30, X-TECH-60
Option maximum load capacity (kg)	20.000

