

WASH BAY

X-WASH X-4



Recycles 100% of water used



Zero contaminants released down the drain




Outdoor & Indoor use

filtering system



Mod. X-TECH-10
1000 liters' capacity

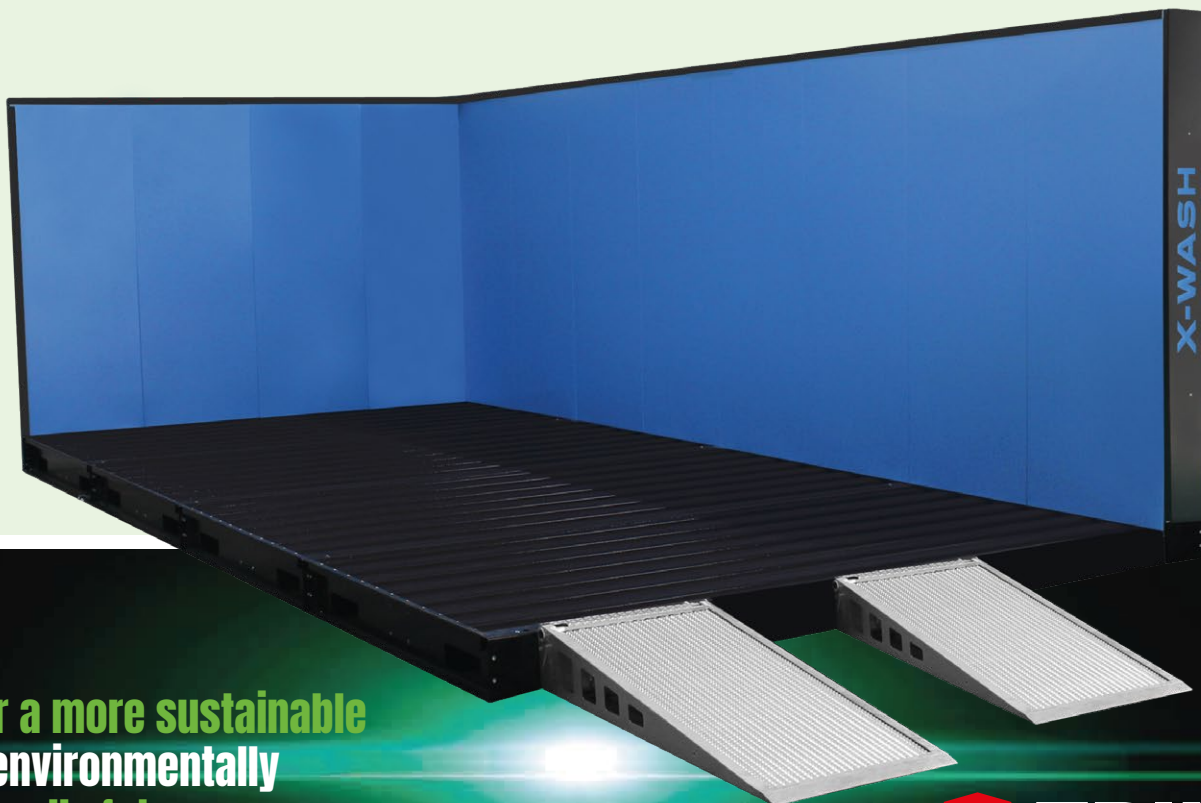

**For a more sustainable
& environmentally
friendly future**




TRIME®
Water Treatments

X-WASH X-4

WASH BAY

UNIT DIMENSIONS

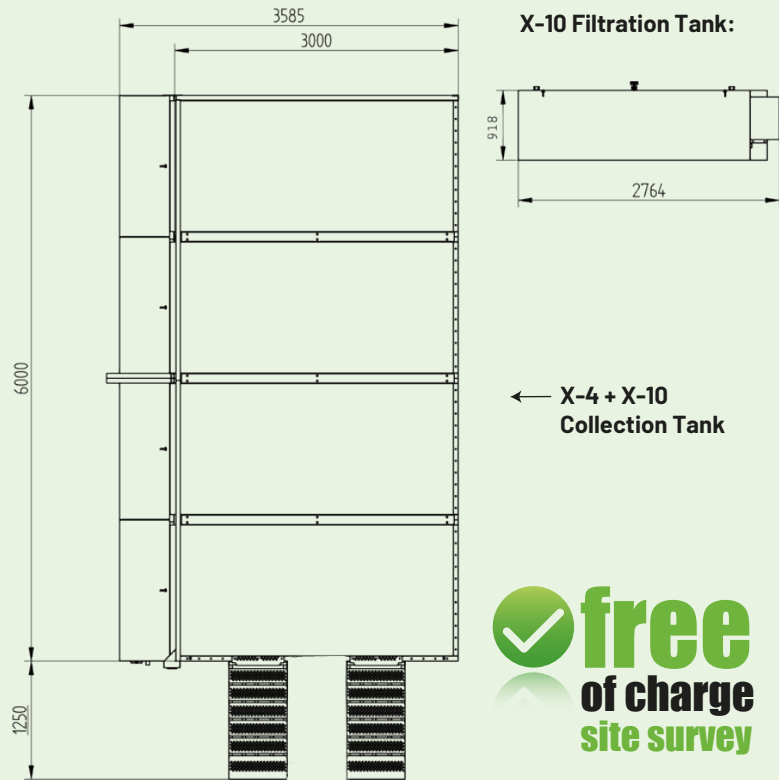


FEATURES

- ✓ Recycles 100% of water used for re-use in your pressure washer
- ✓ Closed circuit system
- ✓ Easy to move and transport
- ✓ Quick and simple assembly
- ✓ Zero water waste
- ✓ Environmentally friendly

SITE REQUIREMENTS

- ✓ 230V 16A Electric connection
- ✓ Water connection
- ✓ Flat and level concrete base works

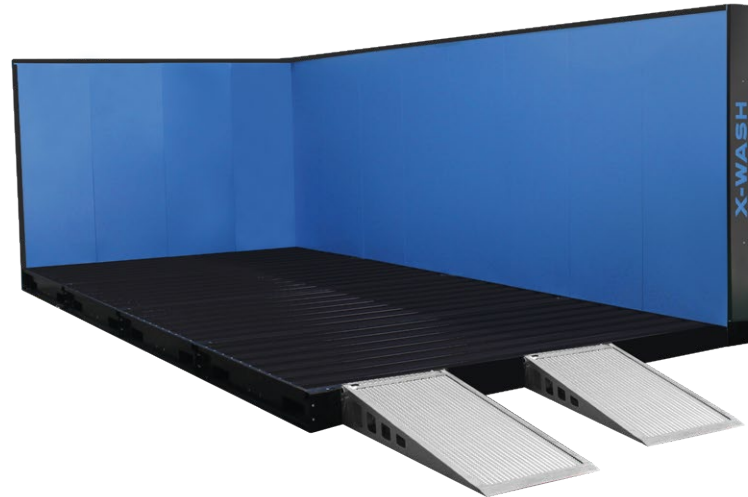

A self-contained, environmentally friendly, cleaning system for construction plant and equipment. It's composed of a wash bay which features diamond tread ramps and 2200 mm high walls. The wash bay floor pan directs the dirty water and sludge from the equipment being cleaned to a solids collection tank at the rear of the wash bay. Inside the rear tank, a float switch activates a diaphragm pump that delivers the dirty water into the filtration tank to commence the filter process. After the water has been through the filter process a booster pump delivers the water again to your pressure washer. Through the filtrating system it allows you to use the same water repeatedly. The filters inside the separator tank can be easily replaced guaranteeing an adequate filtering barrier.

Technical data

Wash bay area dimension (mm)	3000 x 6000
Total dimension (mm)	7250 x 3585
Filtration tank dimension (mm)	(X-10) 2810 x 740 x 990h
Maximum load capacity (kg)	5000
Walls standard height (mm)	2200
Total dry weight of the bay (kg)	2240
Diaphragm pump	0,054 kW – 17lt/min
Booster pump	0,37 kW – 5 to 40 lt/min
Filtering system	X-TECH-10
Option filtering system	X-TECH-30, X-TECH-60
Option maximum load capacity (kg)	20.000

