

WASH BAY

## X-WASH X-8



Recycles 100% of water used



Zero contaminants released down the drain



Outdoor & Indoor use

### filtering system



Mod. X-TECH-30  
3000 liters' capacity




For a more sustainable  
& environmentally  
friendly future




**TRIME**<sup>®</sup>  
Water Treatments

### UNIT DIMENSIONS

#### X-8 + X-30 Collection Tank:

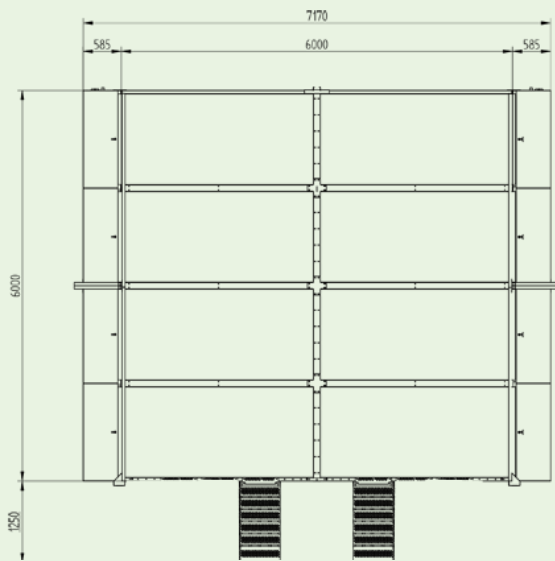

#### X-30 Filtration Tank:



 **free**  
of charge  
site survey



A self-contained, environmentally friendly, cleaning system for construction plant and equipment. It comes as standard with heavy duty automatic X-TECH-30 filtration systems. The wash bay features a diamond tread ramp and a 2200 mm high wall. The wash bay floor pan directs the dirty water and sludge from the equipment being cleaned to a solids collection tank at the rear of the wash bay. Inside the rear tank, a float switch activates a diaphragm pump which delivers the dirty water into the filtration tanks to start the filtration process. After the water has been through this process, a booster pump delivers the water again to your pressure washer. Through the filtrating system, you can use the same water repeatedly. The filters inside the separator tank can be easily replaced, guaranteeing an adequate filtering barrier.



### FEATURES

- ✔ Recycles 100% of water used for re-use in your pressure washer
- ✔ Closed circuit system
- ✔ Easy to move and transport
- ✔ Quick and simple assembly
- ✔ Zero water waste
- ✔ Environmentally friendly

### SITE REQUIREMENTS

- ✔ 230V 16A Electric connection
- ✔ Water connection
- ✔ Flat and level concrete base works

| Technical data                    |                                   |
|-----------------------------------|-----------------------------------|
| Wash bay area dimension (mm)      | <b>6000 x 6000</b>                |
| Total dimension (mm)              | <b>7250 x 7170</b>                |
| Filtration tank dimension (mm)    | <b>(X-30) 3650 x 1010 x 2160h</b> |
| Maximum load capacity (kg)        | <b>5000</b>                       |
| Walls standard height (mm)        | <b>2200</b>                       |
| Total dry weight of the bay (kg)  | <b>4370</b>                       |
| Diaphragm pump                    | <b>0,054 kW – 17lt/min</b>        |
| Booster pump                      | <b>0,37 kW – 5 to 40 lt/min</b>   |
| Filtering system                  | <b>X-TECH-30</b>                  |
| Option filtering system           | <b>X-TECH-60</b>                  |
| Option maximum load capacity (kg) | <b>20.000</b>                     |

